

Section 02316 S

EXCAVATION AND BACKFILL FOR STRUCTURES

The following supplements modify Section 02316 - Excavation and Backfill for Structures Standard Specification. Where a portion of the Specification is modified or deleted by this Supplementary Specification, the unaltered portions of the Specification shall remain in effect.

1.03 DEFINITIONS: Delete paragraph D and replace with the following paragraph D.

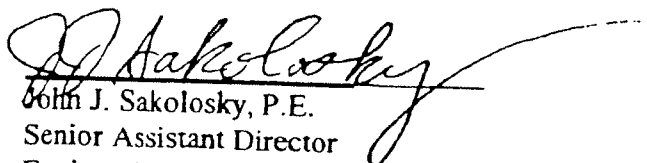
D. Backfill: Material meeting specified quality requirements, placed and compacted under controlled conditions around structures.

3.08 BACKFILL: Delete paragraph A and replace with the following paragraph A.

A. Complete backfill to surface of natural ground or to lines and grades shown on Drawings. Remove forms, lumber, trash and debris from structures.

1. Unless otherwise shown on Drawings, for structures under pavement or within one foot back of curb, use cement stabilized sand up to pavement base or subgrade.
2. Unless otherwise shown on Drawings, for structures not under pavement, use cement stabilized sand to within 2 feet of final grade. Use Random backfill of suitable material for top two feet.

END OF SUPPLEMENT


John J. Sakolosky, P.E.
Senior Assistant Director
Engineering, Construction & Real Estate Division

2/20/03

Date